


TRC-NW400

Non-Mydriatic Retinal Camera



Fully Automated True Color Fundus Camera TRC-NW400

The TRC-NW400 is an automated and robotic fundus camera that performs true color photography. By incorporating the 360° rotating touch panel monitor, the operator is able to acquire the image rapidly and easily by a simple finger touch. It makes your workflow efficient.

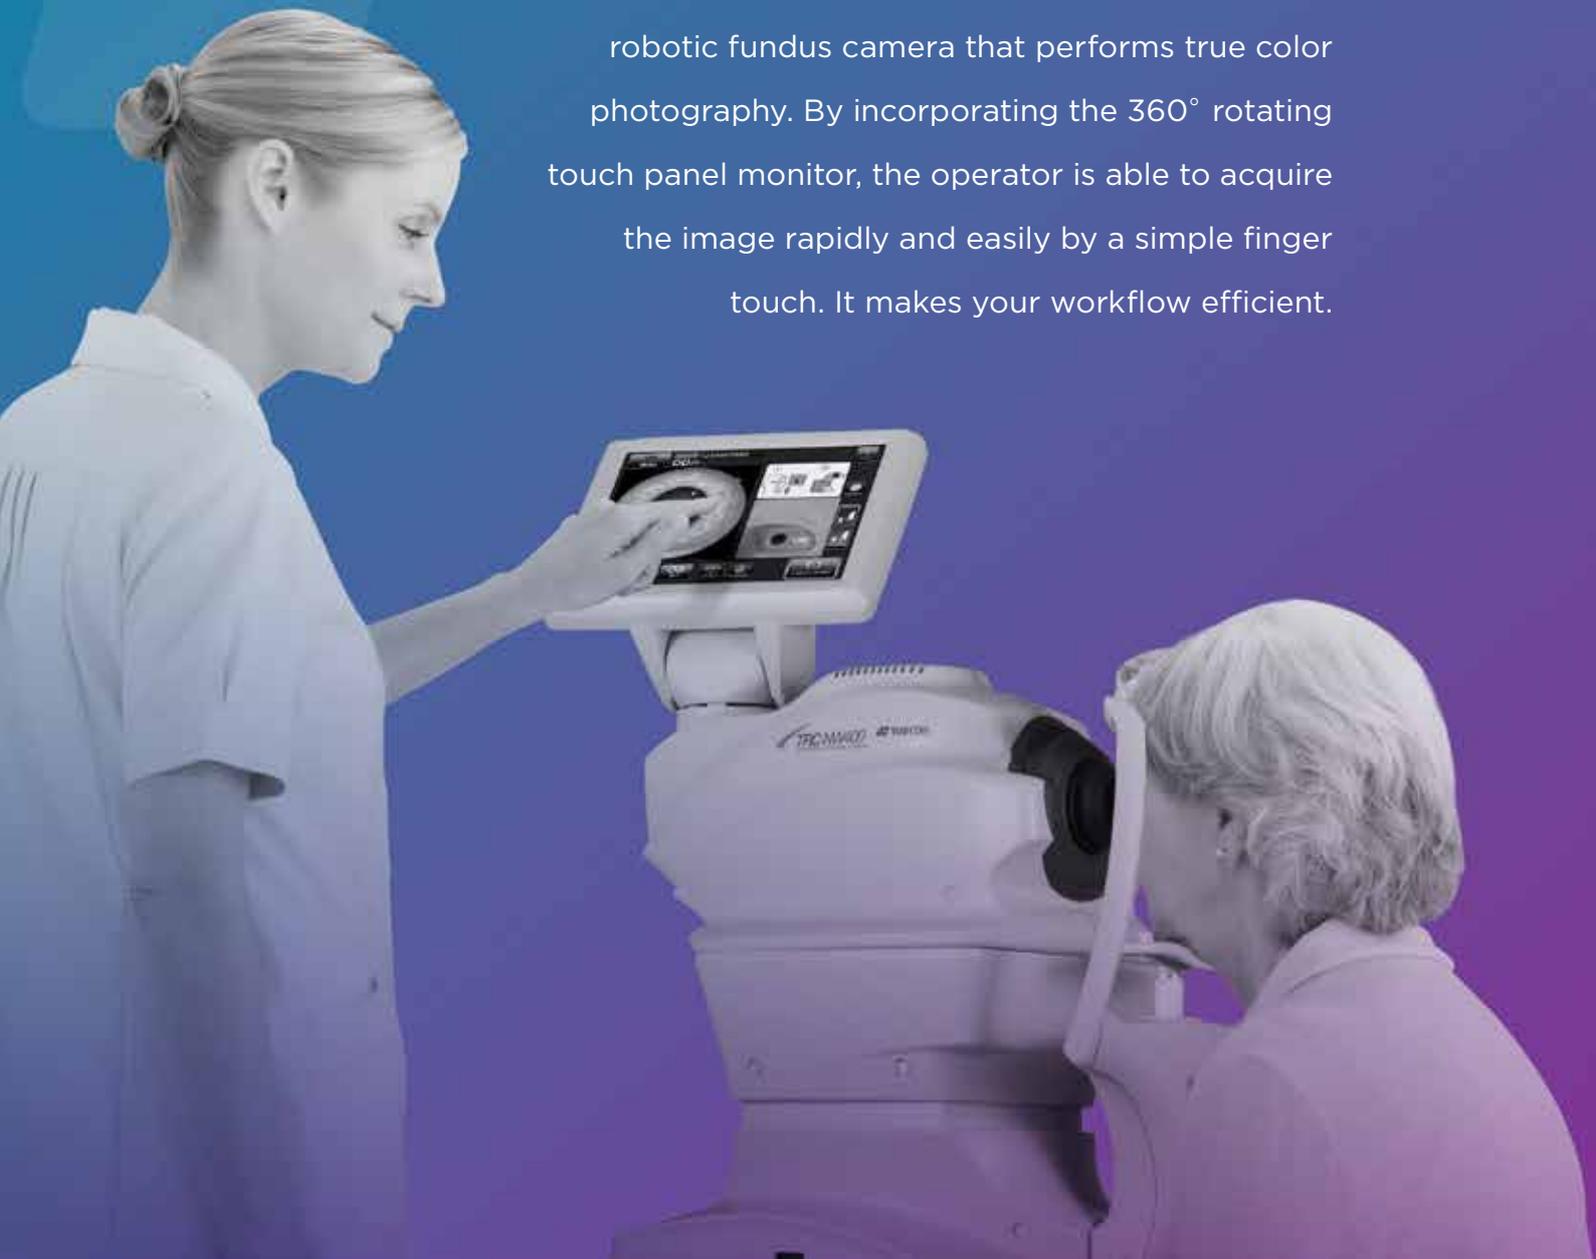

Overview



Robotic Fundus Camera



Clear Color Fundus Image



Rapid and Simple Capture by Single touch



Small Footprint. Space Saving



Small Pupil Photography with $\phi 3.3\text{mm}$ or more



Quick Stereo Photography



Full 360° rotating monitor allows operator to optimize distance from patient



Variety of Connectivity Options




Connect with your EMR to create patient worklists conveniently in one centralized place

Image Samples

1. Healthy Eye
2. Healthy Eye
3. High Myopia & Glaucoma Suspect
4. Epiretinal Membrane

Image courtesy:
New York Eye and Ear Infirmary of Mount
Sinai NYC

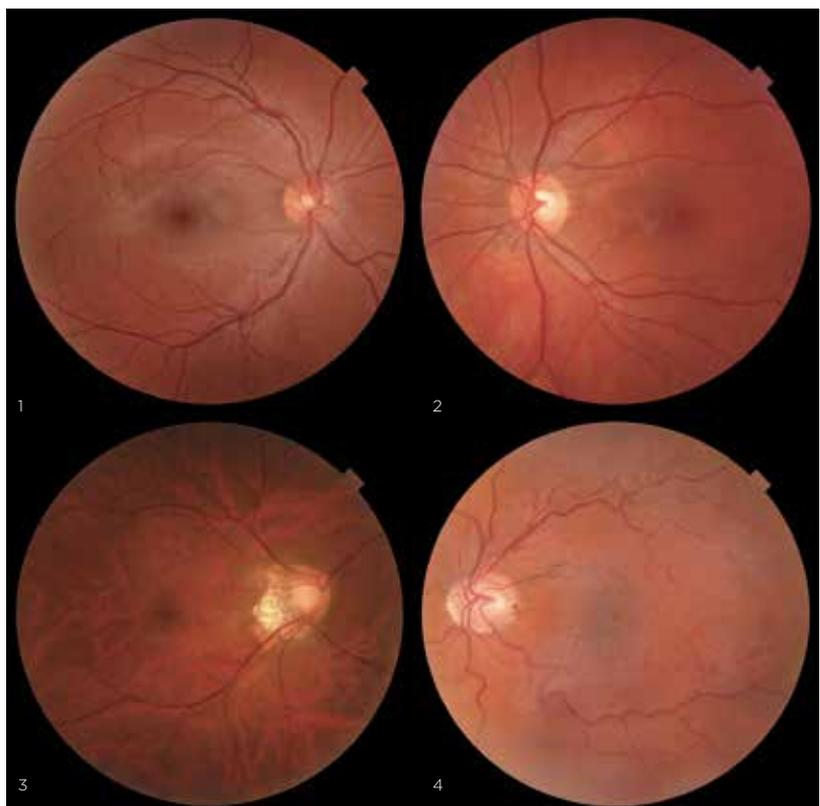

High Quality Image Meets Ease of Use



Fully Automatic Mode

In full auto mode, Alignment, Focusing, Shooting and movement between the right eye and left eye are operated automatically. The operator can use with minimum training. The operator simply touches the screen to select a mode, touches the center of the pupil and presses "Capture START".

The TRC-NW400 provides consistent results regardless of operator experience.



Register patient



Adjust the chinrest position and touch [Capture START]



Result instantly available

Manual Operation Mode

In manual mode, the operator can drive the camera using the touch screen as if via the Control lever. This is particularly useful in cases when an operator would like to shoot a specific area of the fundus. In manual mode, all movements of the camera are adjusted by finger touch. Illumination level, flash intensity, diopter adjustment and fixation targets can also be manually regulated.



Register patient



Adjust the chinrest position and touch [Capture START]



Stop the auto process and adjust in "Manual" mode




Result instantly available

Key Features

Space Saving

The TRC-NW400 incorporates a rotating touch panel monitor that allows the operation of the instrument from virtually any angle. This feature lets the operator be in front, behind or at either side of the patient, optimizing space saving. The TRC-NW400 can comfortably be operated when located against a wall or in a corner.

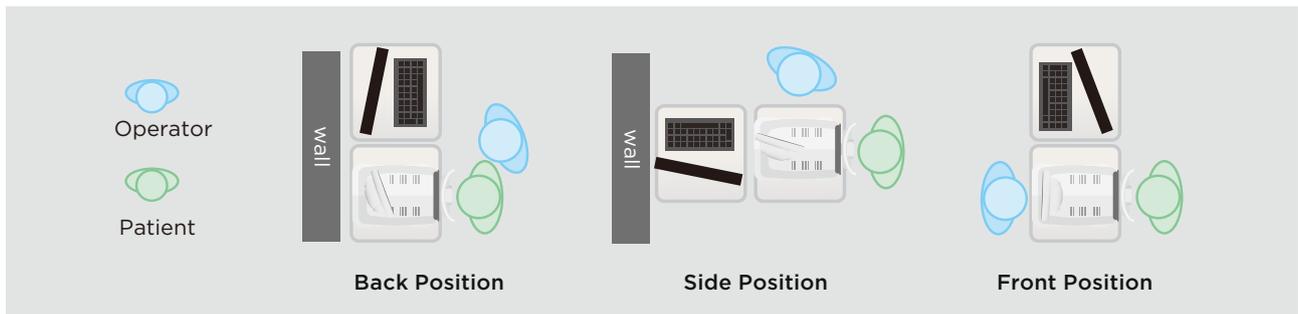

Stereo Photography*

In Stereo photography mode, the alignment for a stereo pair is performed automatically. Following the prompts on screen a stereo pair for stereo viewing can be quickly and easily acquired.


* Stereo viewer software is not incorporated.



Rich Features

Internal Fixation Target Operation

The Traditional 3 fixation targets (Disc, Center and Macula) as well as the 9 fixation target for peripheral photography are incorporated.

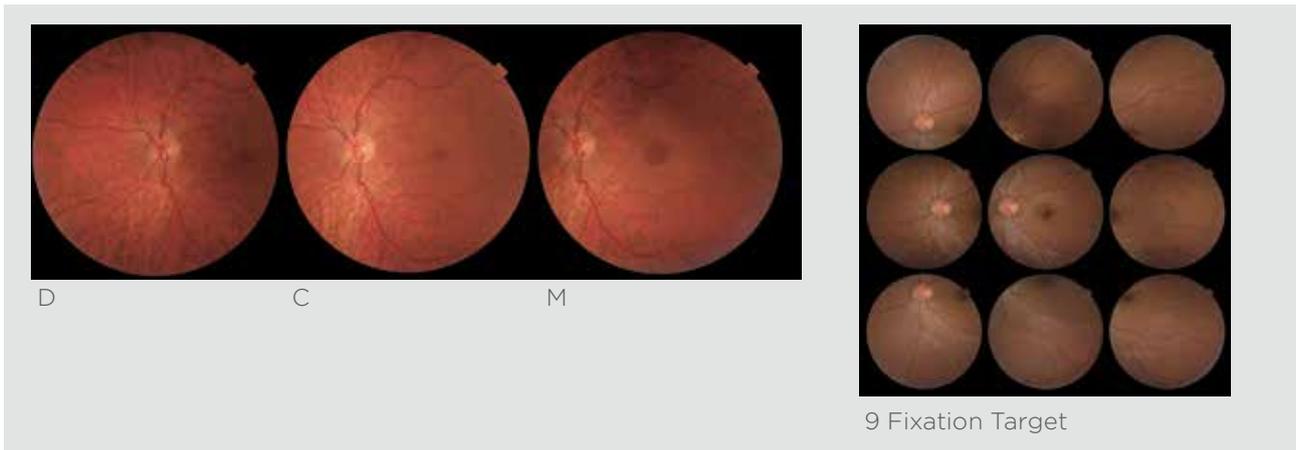

Small Pupil Photography & Zoom Function

The TRC-NW400 enables the user to acquire retinal images with pupils $\Phi 3.3\text{mm}$ or more, assisting functions as small pupil aperture, digital zooming function and overlaid mask.

When the "small pupil mode" is selected, the camera will automatically adjust for small pupils*.

*Details depend on setting



Anterior Photography

Anterior photography function allows for quick documentation of external conditions of the eye surface and cornea.



Anterior Image
Courtesy: New York Eye and Ear Infirmary of Mount Sinai NYC


Low Flash

For patient comfort and compliance, a low 4.0Ws flash intensity is normally utilized, producing excellent images with low flash and reducing patient's discomfort.

Connectivity


Direct DICOM

The TRC-NW400 is DICOM compliant, making it easy to integrate within PACS and EMR programs.

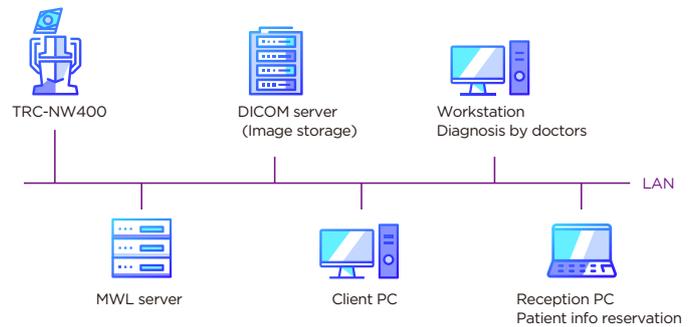


Shared Folder

The TRC-NW400 can save images into a shared folder on a network. By using a shared folder, the third party's system can retrieve the images from the TRC-NW400 and save them into their system.

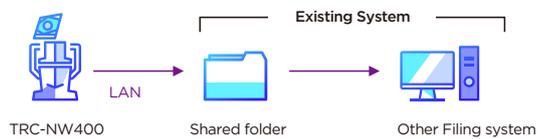


Ez Capture

The TRC-NW400 includes EZ Capture as a standard software.

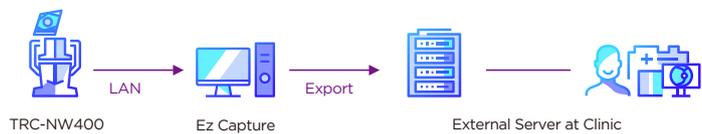

IMAGEnet 6

The TRC-NW400 can save a digital image to IMAGEnet 6, ophthalmic data system. IMAGEnet 6 is an optional software.



Direct Storage

Direct Storage is the simplest configuration and does not require an external PC. Convenient for mobile stations or when a network is not used.



Specification of TRC-NW400

Observation & photography of the fundus

Angle of coverage	45°/30° (digital zoom)
Working distance	34.8mm (in fundus photography)
Pupil diameter for photography	φ 4.0mm or more Small pupil diameter: φ 3.3mm or more
Fixation target	<p>Internal fixation target:</p> <ul style="list-style-type: none"> • Dot matrix type organic ELD display • The display position can be changed and adjusted. • The displaying method can be changed. <p>Peripheral fixation target:</p> <ul style="list-style-type: none"> • This is displayed according to the internal fixation target displayed position. <p>External fixation target</p>
Patient Diopter Correction Range	
Without the diopter compensation lens	-13D to +12D
When the concave compensation lens is used	-33D to -12D
When the convex compensation lens is used	+11D to +40D
Power Source	
Source Voltage	AC100-240V
Power Input	120VA
Frequency	50-60Hz
Dimensions and Weight	
Dimensions	272 - 383mm (W) × 464 - 660mm (D) × 512 - 700mm (H)
Weight	18kg

Tablet Control



The breath shield is not part of the product configuration of TRC-NW400*


*Please check with your local distributor for availability in your country.

Optional Accessory



External fixation target

EF-2



TOPCON CORPORATION

75-1 Hasunuma-cho, Itabashi-ku, Tokyo 174-8580, JAPAN. Phone: +81-(0)3-3558-2522/2502 Fax: +81-(0)3-3965-6898 www.topcon.co.jp

TOPCON SINGAPORE MEDICAL PTE. LTD.

100G Pasir Panjang Road, #05-05, Interlocal Centre, SINGAPORE 118523
Phone: +65-62720606
Fax: +65-67736150
E-mail: med.sales.sg@topcon.com
www.topcon.com.sg

TOPCON INSTRUMENTS (MALAYSIA) SDN. BHD.

No.6, Jalan Pensyarah U1/28, Hicom Glenmarie Industrial Park, 40150 Shah Alam, Selangor, MALAYSIA
Phone: +60-(0)3-50223688
Fax: +60-(0)3-50313968
E-mail: mys_medical_sales@topcon.com

TOPCON INSTRUMENTS (THAILAND) CO., LTD.

77/162 Sinnsathorn Tower, 37th Floor, Krungthoburi Rd., Klongtong, Bangkok 10600, THAILAND
Phone: +66(0)2-440-1152-7
Fax: +66-(0)2-440-1158
E-mail: tha_medical@topcon.com

MEHRA EYTECH PRIVATE LIMITED

801 B Wing, Lotus Corporate Park, Graham Firth Steel Compound Goregaon (East) Mumbai 400063 Maharashtra, INDIA
Phone: +91-22-61285455
www.mehraeytech.in

TOPCON (BEIJING) MEDICAL TECHNOLOGY CO., LTD.

Room 2808, Tower C, JinChangAn Building, No.82, Middle Section of East 4th Ring Road, Chaoyang District, Beijing 100124, P.R. CHINA
Phone: +86-10-8794-5176

IMPORTANT In order to obtain the best results with this instrument, please be sure to review all user instructions prior to operation.
Not available for sale in all countries. Please check with your local distributor for availability in your country.

TOPCON Healthcare

SEEING EYE HEALTH DIFFERENTLY